

Modeling Task Effects on Meaning Representation in the Brain via Zero-Shot MEG Prediction

Mariya Toneva^{*1,2}, Otilia Stretcu^{*1}, Barnabás Póczos¹, Leila Wehbe^{1,2}, and
Tom M. Mitchell^{1,2}

¹Machine Learning Department, Carnegie Mellon University

²Neuroscience Institute, Carnegie Mellon University

How meaning is represented in the brain is still one of the big open questions in neuroscience. Does a word (e.g., *bird*) always have the same representation, or does the task under which the word is processed alter its representation (answering “*can you eat it?*” versus “*can it fly?*”)? The brain activity of subjects who read the same word while performing different semantic tasks has been shown to differ across tasks. However, it is still not understood how the task itself contributes to this difference. In the current work, we study Magnetoencephalography (MEG) brain recordings of participants tasked with answering questions about concrete nouns. We investigate the effect of the task (i.e. the question being asked) on the processing of the concrete noun by predicting the millisecond-resolution MEG recordings as a function of both the semantics of the noun and the task. Using this approach, we test several hypotheses about the task-stimulus interactions by comparing the zero-shot predictions made by these hypotheses for novel tasks and nouns not seen during training. We find that incorporating the task semantics significantly improves the prediction of MEG recordings, across participants. The improvement occurs 475 – 550ms after the participants first see the word, which corresponds to what is considered to be the ending time of semantic processing for a word. These results suggest that only the end of semantic processing of a word is task-dependent, and pose a challenge for future research to formulate new hypotheses for earlier task effects as a function of the task and stimuli.

1 Introduction

One of the central goals of artificial intelligence (AI) is to build intelligent systems that understand the meaning of concepts and use it to perform tasks in the real world. Despite the great strides in learning representations, there are still many problems that could benefit from further improvements in understanding and representing *meaning*, such as symbol

^{*}Equal contribution. Correspondence: mariya@cmu.edu, ostretcu@cs.cmu.edu

grounding, common-sense reasoning, and natural language understanding. While machines are limited in these areas, we do have one system that is capable of representing meaning and performing these tasks well: the human brain. Thus, looking to the brain for insights about how we represent and compose meaning may be beneficial.

Studies of meaning representation in neuroscience have revealed that the brain accesses meaning differently depending on the demands of a task (Binder *et al.*, 2009; Gan *et al.*, 2013; Hebart *et al.*, 2018; Xu *et al.*, 2018; Wang *et al.*, 2018). For instance, the recorded brain activity of a participant that observes the word “cat” differs according to whether the participant is asked to answer whether “cat” is an animal or a vegetable (Kiefer, 2001). The difference is shown to occur between 400 – 600ms after “cat” is presented to the participant, a period when it is believed that the brain processes the semantics of the perceived word (Helenius *et al.*, 1998), suggesting an interaction between the task and stimulus meaning. One hypothesis for the interaction that has received some experimental backing is that, in order to solve the task, the brain uses attention mechanisms to emphasize task-relevant information (Smith *et al.*, 1974; Cohen *et al.*, 1990; Kanwisher and Wojciulik, 2000; Cukur *et al.*, 2013; Nastase *et al.*, 2017). However, the computational principle behind this attention mechanism is poorly understood, as it can be due to several neural properties, such as an increased response gain, sharper tuning (Brouwer and Heeger, 2013), or a tuning shift (Cukur *et al.*, 2013).

In this work, we propose the first computational model that implements precise hypotheses for the interaction between the semantics of tasks and that of individual concepts in the brain, and tests their ability to explain brain activity. We posit that formulating such a computational model will be a helpful step towards specifying a full account of the task-stimulus interactions. Specifically, we study how tasks interact with the semantics of concepts by building models that predict recorded brain activity of people tasked with answering questions (e.g., “*is it bigger than a microwave?*”) about concrete nouns (e.g., “*bear*”). Importantly, the proposed model is able to generalize to previously unseen tasks and stimuli, allowing us to make zero-shot predictions of brain recordings.

Using this computational framework, we show that models that predict brain recordings as a function of the task semantics significantly outperform ones that do not during time windows (475 – 550ms and 600 – 650ms) which largely coincide with the end of semantic processing of a word, typically thought to last until 600ms (Helenius *et al.*, 1998). This result suggests that only the end of semantic processing of a word becomes task-dependent and that this effect is related to the meaning of the task. We believe that in addition to this result, neuroscientists will also be interested in the ability to computationally compare different hypotheses for the task-stimuli interactions, and we hope that our general problem formulation will benefit future research attempting to study other forms of interaction not considered in this work. Additionally, our work may be of interest to the AI community. Further understanding task effects on concept meaning in the brain may provide insight into building AI models that learn how to combine representations specific to the task with task-invariant representations of concepts, as a step towards composing meaning that is both goal-oriented and more easily adaptable to new tasks.

Our **main contributions** can be summarized as follows:

- We propose a means of representing the semantics of the question task that shows significant relationship with the elicited brain response. We believe such an approach

could be useful to future studies on question-answering in the brain.

- We propose the first computational model to predict brain recordings as a function both of the task and the semantics of the observed stimulus. We further ensure that all models learn to predict the MEG recordings in a *zero-shot* setting, so that they are able to predict MEG recordings that correspond to novel tasks and stimuli not seen during training.
- We show that models that integrate task and stimulus representations have significantly higher prediction performance than models that do not account for the task semantics, and localize the effect of task semantics largely to time-windows in 475 – 650ms after the stimulus presentation.

2 Related work

Classical neuroimaging experiments that study meaning by contrasting different stimulus conditions often include a task that is related to processing the meaning of the word (such as judging the similarity of two stimuli), however these experiments do not use predictive models that systematically relate the stimulus properties to the brain recordings, and do not explicitly investigate the task effect.

A number of previous studies have used predictive models to examine the relationship between brain recordings and stimulus properties, but have also not explicitly investigated the effect of a task. In many of these studies (Mitchell *et al.*, 2008; Fyshe *et al.*, 2013; Wehbe *et al.*, 2014a; Jain and Huth, 2018; Toneva and Wehbe, 2019), the participants performed only one task – language comprehension – and, although this complex task can arguably be broken down into simpler tasks, this question was not explicitly investigated by the authors. In contrast, Sudre *et al.* (2012) explicitly tasked participants with answering yes/no questions about objects. Even though the original paradigm of Sudre *et al.* (2012) results in task-dependent brain recordings, the authors average the brain recordings for the same stimulus across tasks and learn predictive models only based on the semantics of the objects. While averaging over repetitions of the same stimulus can boost the signal-to-noise ratio, it likely loses the task-dependent information in the brain recordings. Here we reanalyze the original task-dependent single-repetition data from Sudre *et al.* (2012) to investigate the task-dependent brain recordings using predictive models that include representations of both the object and the question.

One previous work uses a predictive model to investigate task effects (Cukur *et al.*, 2013), and is thus closest to ours. In this work, the authors asked participants to attend to one of two object categories in natural scene stimuli. The authors then learn two separate models, each of which is trained to predict the fMRI recordings of participants in one of the 2 tasks as a function of the stimuli representations. They then compare the learned weights of the 2 models to conclude that each task-specific model puts more emphasis on those stimulus features that are related to the task. In contrast to this work, we integrate both the task and the stimulus representations into a single zero-shot learning framework, which allows us to predict brain recordings corresponding to novel tasks and stimuli. Additionally, we predict MEG recordings which have a 2000-times finer temporal resolution than the fMRI recordings used by Cukur *et al.* (2013), which allows us to localize the task effect in time.

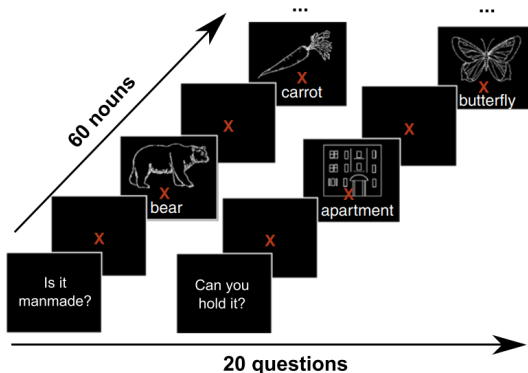


Figure 1: Experimental paradigm recreated from Sudre *et al.* (2012). Subjects shown a question, followed by 60 concrete nouns along with their line drawings in random order.

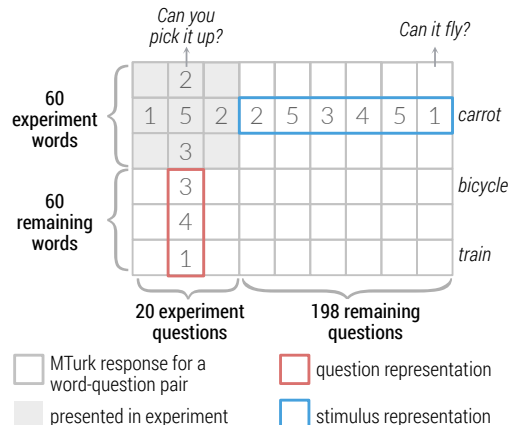


Figure 2: Feature representations of questions and stimuli obtained from Mechanical Turk.

The work of Nastase *et al.* (2017) also use a computational approach to investigate task effects. These authors account for the task directly in their computational model by constructing a different representational dissimilarity space (Kriegeskorte *et al.*, 2008) for each of two tasks, and then comparing these to the representational dissimilarity space of brain recordings. The representational spaces of the stimuli are entirely task-dependent and do not incorporate the stimulus semantics. This is a limitation because this model is not able to investigate the relationship between the brain recordings and a possible interaction between the task and stimulus. Moreover, similarly to Cukur *et al.* (2013), Nastase *et al.* (2017) predict fMRI recordings, limiting the investigation of the task effect in time.

3 Methodology

3.1 Brain data

We aim to study the effect of a task on the brain representation of a stimulus, when the stimulus is shown while performing the task. To this end, investigating the magnetoencephalography (MEG) dataset presented in Sudre *et al.* (2012), which contains 20 different question tasks, makes for an excellent case study and was provided upon our request.

In this experiment, subjects were asked to perform a question-answering task, while their brain activity was recorded using MEG. Figure 1 illustrates the experimental paradigm. Subjects were first presented with a question (e.g., “Is it manmade?”), followed by 60 concrete nouns, along with their line drawings, in a random order. Each stimulus was presented until the subject pressed a button to respond “yes” or “no” to the initial question. Once all 60 stimuli are presented, a new question is shown for a total of 20 questions. Thus we have a total of $60 \text{ stimuli} \times 20 \text{ questions} = 1200 \text{ examples}$.

MEG samples the amplitude of the magnetic field induced by neuronal firing at 306 sensors positioned on the scalp of a subject every millisecond. The data were preprocessed using standard MEG preprocessing procedures (details in Appendix A). We analyze the data from

the beginning of the stimulus word presentation (i.e. 0ms) to 800ms, to avoid contributions to the brain signal from the participant’s button-press (median response time across stimuli is 913ms, averaged across subjects). We further downsample the recordings in time by averaging non-overlapping 25ms windows, resulting in data of size 306 sensors \times 32 time windows. We analyze data from 6 of the original 9 subjects. Data from 3 subjects were excluded because of missing trials.

3.2 Selecting representations for questions and stimuli

To study the effect of the question on the meaning representation of a word, we first need a way to represent both the semantics of the question and that of the word. We created two types of word and question representations: one type derived from a pretrained bidirectional model of stacked transformers (BERT) (Devlin *et al.*, 2018), which is a popular model used for question-answering tasks, and a second type derived from Amazon Mechanical Turk (MTurk) of people answering questions about concrete nouns. We find that the MTurk representations significantly outperform the BERT ones in the prediction tasks outlined in the following sections, and so we focus on the MTurk representations in the main text and provide a detailed description of the BERT features and related results in Appendix D.

The Mechanical Turk data was originally collected by Sudre (2012) and was provided at our request. Participants on MTurk were shown a set of 120 words (e.g., “bear”, “house”) and were requested to answer 218 questions about them (e.g., “Is it fragile?”, “Can it be washed?”) on a scale from 1 to 5 (“definitely not” to “definitely yes”). In this dataset, 60 out of the 120 presented words and 20 out the 218 questions corresponded to the stimuli and questions shown during the brain recording experiment. A complete list of words and questions is shown in Appendix G.

Using this dataset, we define the representation of a word as a vector containing the MTurk responses for that word to all 198 questions not in the experiment (see Figure 2). Moreover, we define the task (i.e. question) representation as a vector containing the MTurk responses for the 60 words which are not in the experiment. We purposefully excluded the questions and words in the brain experiment from these representations. Note that Sudre *et al.* (2012) used the same word representations, but to the best of our knowledge, we are the first to represent question semantics as a collection of answers.

3.3 Hypotheses

Next, we formulate several hypotheses of how the question integrates with the stimulus in order to give rise to a task-dependent meaning representation. First, we will introduce the notation used to define the hypotheses, as well as the concrete models described in the next section. Using the notation in Table 1, we propose the following hypotheses, also shown in Figure 3:

Hypothesis 1 (no task effect): The brain activity is not affected by the task and can mostly be explained by the stimulus. Thus, we can approximate the elicited brain activity as: $b = f_s(s)$.

Hypothesis 2 (no stimulus effect): The brain activity is not affected by the stimulus and can mostly be explained by the task. Thus, we can approximate the elicited brain

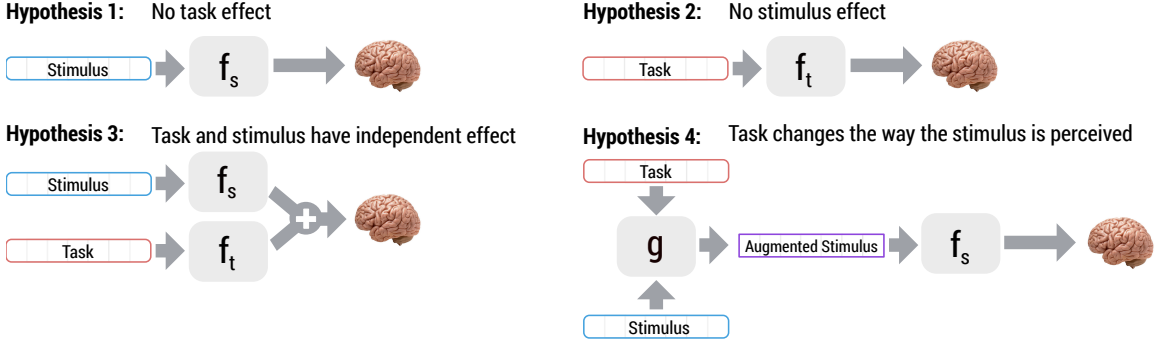


Figure 3: Proposed task-stimulus integration hypotheses.

activity as: $b = f_t(s)$. While this hypothesis may not predict the brain activity the best, it will allow us to localize the task effect.

Hypothesis 3 (additive): Both the stimulus and the task affect the brain activity, but their contributions are independent: $b = f_s(s) + f_t(t)$.

Hypothesis 4 (interactive): The brain activity is well explained by the stimulus, but the task changes the way the stimulus is perceived: $b = f_s(t \otimes s)$. We can think of this as the task focusing *attention* on particular features of the stimulus that are relevant to the task (e.g., in answering the question “Is it bigger than a car?” for the stimulus “dog”, we pay more attention to the features of “dog” that are related to size, and ignore others such as color). This hypothesis aligns with the conclusions of Cukur *et al.* (2013) that a task emphasizes those semantic dimensions of the stimulus that are relevant to the task. We use the notation \otimes to represent generically any type of augmentation, and in Section 3.4 we describe in detail the forms of attention used in our experiments.

3.4 Predicting brain activity under different hypotheses

We next formulate models to represent the parametric functions f_s and f_t in the proposed hypotheses and to learn the parameters that best predict the brain activity. Our notation is summarized in Table 1. In the rest of this paper, we refer to the hypotheses using the abbreviations H1, H2, H3 and H4.

3.4.1 Models

The functions f_s and f_t can be represented using any regression models that map from a feature space to the brain activity space. Prior work (Mitchell *et al.*, 2008; Nishimoto *et al.*, 2011; Wehbe *et al.*, 2014b; Huth *et al.*, 2016) has shown that simple multivariate regression models such as *ridge regression* are reliable tools for predicting brain activity from stimulus features and are able to achieve good accuracy. For this reason, we will adopt the ridge regression setting for modeling f_s and f_t . In ridge regression, we model the output of a function f as a linear combination of the input features: $\hat{y} = f(x) = xW$, where W is a parameter matrix. W is trained to minimize the loss function $\|Y - XW\|_F^2 + \lambda\|W\|_F^2$, consisting of the mean squared error of the predictions and a regularization term on the parameters to avoid overfitting. Here X and Y represent the training inputs and targets,

Table 1: Notation used in defining the proposed hypotheses and models.

N_s	num. unique stimuli in experiment, 60	\hat{b}	predicted brain activity; $\hat{b} \in \mathbb{R}^{LT}$
N_t	num. unique tasks in experiment, 20	X_s	stimuli representations, stacked for all repetitions; $X_s \in \mathbb{R}^{R \times F_s}$
R	total num. repetitions, over all stimuli, 1200	X_t	task representations, stacked for all repetitions; $X_t \in \mathbb{R}^{R \times F_t}$
L	space dimension of the brain activity, 306	Y_b	recorded brain activity, stacked for all repetitions; $Y_b \in \mathbb{R}^{R \times LT}$
T	time dimension of the brain activity, 32	f_s	function mapping from s to \hat{b} ; $f_s : \mathbb{R}^{F_s} \rightarrow \mathbb{R}^{LT}$
F_s	num. features in stimulus representation, 198 for MTurk; 768 for BERT	f_t	function mapping from t to \hat{b} ; $f_t : \mathbb{R}^{F_t} \rightarrow \mathbb{R}^{LT}$
F_t	num. features in task representation, 20 for MTurk; 768 for BERT		
s	stimulus representation; $s \in \mathbb{R}^{F_s}$		
t	task representation; $t \in \mathbb{R}^{F_t}$		

respectively, stacked together, $\|\cdot\|_F$ denotes the Frobenius norm, and $\lambda > 0$ is a tunable hyperparameter representing the regularization weight. In our setting, the targets of the prediction Y consist of the MEG recording of the brain activity, Y_b , described in Table 1. However, the inputs X depend on the hypothesis being tested, as we describe further.

Hypothesis 1: Under a *no task effect* hypothesis, we predict the brain activity as a function of the stimulus features only, $Y_b = f_s(X_s) = X_s W_s$, where $W_s \in \mathbb{R}^{F_s \times LT}$. Our objective function becomes:

$$\min_{W_s} \|Y_b - X_s W_s\|_F^2 + \lambda \|W_s\|_F^2 \quad (1)$$

Hypothesis 2: Under a *no stimulus effect* hypothesis, we predict the brain activity as a function of the task features only, $Y_b = f_t(X_t) = X_t W_t$, where $W_t \in \mathbb{R}^{F_t \times LT}$. Our objective function becomes:

$$\min_{W_t} \|Y_b - X_t W_t\|_F^2 + \lambda \|W_t\|_F^2 \quad (2)$$

Hypothesis 3: Under an *additive effect* hypothesis, we predict the brain activity as the sum of the stimulus contribution and task contribution: $Y_b = f_s(X_s) + f_t(X_t) = X_s W_s + X_t W_t$. Note that this is equivalent to a single regression function $f(X_s, X_t) = [X_s, X_t] \cdot [W_s; W_t]^\top$, where $[X_s, X_t]$ is a concatenation of the stimulus and task features, and $W = [W_s; W_t] \in \mathbb{R}^{(F_s + F_t) \times LT}$ is a concatenation of their corresponding weight matrices. Thus, the objective function can be written as:

$$\min_{W_s, W_t} \|Y_b - [X_s, X_t] \cdot [W_s; W_t]\|_F^2 + \lambda \|[W_s; W_t]\|_F^2 \quad (3)$$

Hypothesis 4: Under an *interactive effect* hypothesis, we predict the brain activity as a function of the *augmented* stimulus features. The intuition is that the task *augments* the

features that are relevant. In this work, we consider an implementation of the augmentation using *soft attention* (Hermann *et al.*, 2015), in which the task reweighs the contribution of the stimulus features. To simplify the notation in the following formulations, we will use t and s to refer to both the identity and the representation of a task and a stimulus in the experiment. Each task t is associated with a set of attention parameters $a_t \in \mathbb{R}^{F_s}$ that rescale the original stimulus features when the stimulus s is presented under question t . Thus, the augmented stimulus features under question t become $\bar{s} = a_t \otimes s$, where \otimes represents element-wise multiplication. The augmented stimuli for all training examples can be stacked together in an a matrix $X_{\bar{s}} \in \mathbb{R}^{R \times F_s}$ and used as input to a ridge regression model, similar to H1:

$$\min_{W_s} \|Y_b - X_{\bar{s}}W_s\|_F^2 + \lambda \|W_s\|_F^2 \quad (4)$$

The attention vectors a_t can be precomputed or learned along the regression parameters, as follows:

H4.1. Precomputed attention: The MTurk features have interpretable dimensions for both tasks and stimuli, which enables us to directly compute the hypothesized relevance of different stimuli dimensions to each task. As described in Section 3.2, each semantic dimension of a word corresponds to one of the $F_s = 198$ non-experimental questions (see Figure 2). Given this relationship, we compute the attention parameters for every stimulus presented under task t as $a_t = \text{softmax}([a_{t,\tilde{t}_j}])$ for $j \in \{1, \dots, F_s\}$, where $\tilde{t} \in \mathbb{R}^{F_t}$ is a representation of a non-experimental question, and $a_{t,\tilde{t}} = \text{cosine_similarity}(t, \tilde{t})$. We observe that this precomputed attention indeed emphasizes semantically-relevant word features. For example, the word features with highest attention for the question “*Is it made of metal?*” are “*Is it silver?*” and “*Is it mechanical?*”, whereas those with highest attention for the question “*Can it keep you dry?*” are “*Does it provide shade?*” and “*Is it a building?*”. The top 5 word features with highest attention per question are provided in Appendix E.

H4.2. Learned attention: We learn the attention parameters together with the regression parameters with the objective of predicting the brain recordings as accurately as possible. A direct approach would be to learn a different set of attention parameters a_t for every task t . However, since our goal is to be able to make *zero-shot* predictions for tasks and stimuli never seen during training, we instead learn how to map the features of the task to an attention vector. In our experiments we did so by learning an attention matrix $A \in \mathbb{R}^{F_t \times F_s}$, such that $a_t = \sigma(tA)$, where $\sigma(\cdot)$ represents the sigmoid function, applied element-wise. Putting all pieces together, our objective function becomes:

$$\min_{W_s, A} \|Y_b - \sigma(X_t A)X_s W_s\|_F^2 + \lambda \|W_s\|_F^2 + \lambda_A \|A\|_F^2 \quad (5)$$

3.4.2 Training and evaluation

We next train and evaluate all models. Our goal is to predict brain recordings for any new task and word (i.e. zero-shot). Thus, we train all models using *leave-k-out* cross-validation, in which we leave out all training examples that correspond to task-stimuli pairs that contain

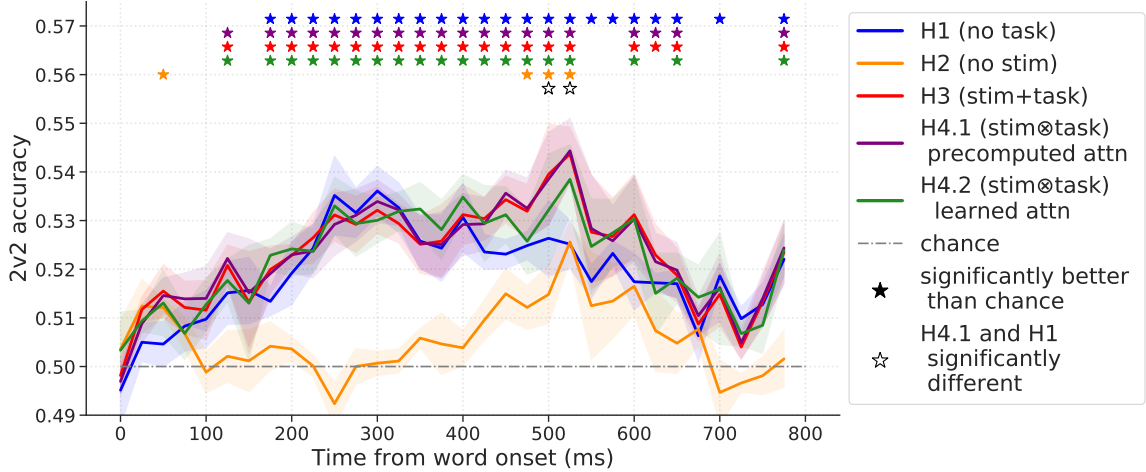


Figure 4: Performance of all hypotheses at predicting the MEG recordings in 25ms windows, averaged over sensors. We show the mean and std. error over subjects. The task effect is mostly localized to 475 – 550ms. Hypotheses that incorporate both the stimulus and task perform similarly across time.

either a task or a word that will be used for testing. We choose the regularization parameters via nested cross-validation.

We evaluate the predictions from each model by using them in a classification task on the held-out data, in the *leave-k-out* setting. The classification task is whether we are able to match the brain data predictions for two heldout task-stimuli pairs to their corresponding true brain data. This task has been previously proposed for settings with low signal-to-noise ratio (Mitchell *et al.*, 2008). The classification is repeated for each leave-k-out fold and an average classification accuracy is obtained for each sensor-timepoint. We refer to this accuracy as *2v2 accuracy*. The theoretical chance performance is 0.5. A more detailed explanation about this metric can be found in Appendix B. Further details about the train/validation/test splitting, parameter optimization, hyperparameter tuning and preventing overfitting can be found in Appendix C.

4 Results and discussion

4.1 Effect of incorporating question task semantics

Time window results. We present the 2v2 accuracy per 25ms time window of all tested hypotheses in Figure 4. The time points for which each accuracy significantly differs from chance are indicated with a \star symbol (one-sample t-test, 0.05 significance level, FDR controlled for multiple comparisons (Benjamini and Hochberg, 1995)). We observe that the hypothesis that only considers the question task semantics (H2) performs significantly better than chance in one early time window (50 – 75ms) and much later during 475 – 550ms. The remaining hypotheses also perform better than chance in the same 475 – 550ms window, but we observe that during the majority of that time H3 and H4.1 perform significantly better than H1 (paired t-test, 0.05 significance level, FDR controlled for multiple comparisons;

significance for the H3-H1 comparison and all other pairwise comparisons are shown in Supplementary Figure 10 in Appendix F). We conclude that incorporating the question task semantics can improve the prediction of MEG recordings. Note that all discussed times are measured relative to stimulus onset.

Sensor-timepoint results. We investigate the task effect further by comparing the contribution of the question-specific precomputed attention and the word features to the accuracy of H4.1 by computing the 2v2 accuracy in two special cases: (1) when the two tested word-question pairs share the same word (i.e. (q_1, w_1) vs (q_2, w_1)), higher-than-chance accuracy is attributed to the precomputed attention features; (2) when the two tested word-question pairs share the same question (i.e. (q_1, w_1) vs (q_1, w_2)), higher-than-chance accuracy is attributed to the word features. These results are presented per sensor-timepoint in Figure 5, where only higher-than-chance accuracies across participants are shown (one-sample t-test, 0.05 significance level, FDR controlled for multiple comparisons). The main contribution of the question-specific attention appears between 400-550ms, localized to the frontal and the left temporal lobes. The contribution of the stimulus features is more distributed, both in time and space. The effect of word semantics begins at 150ms and extends until the end of the considered time, with sustained contributions in the occipital lobes (200 – 600ms) and temporal lobes (400 – 550ms, 600 – 650ms). For ease of visualization, here we present results for 50ms time windows. The results for 25ms time window align with the presented effects and are provided in Appendix F.

Beyond MTurk representations. We experimented with substituting the Mechanical Turk word and question representations with features extracted from BERT (Devlin *et al.*, 2018), which are used by many state-of-the-art methods across several natural language processing problems. In summary, we find that the BERT token-level word embeddings can be a good substitute of the MTurk embeddings, but the question representations of pretrained BERT do not appear to align as closely to the question semantics in the brain. These results can be found in Appendix D. We also tested replacing the stimulus representations with random vectors, which resulted in chance performance.

4.2 Comparison of task-stimulus interaction hypotheses

We further test which of the 3 hypothesized types of task-stimulus interaction (i.e., independent in H3, precomputed attention in H4.1, or learned attention in H4.2) best explains the observed MEG recordings. We observe that there is no significant difference among these hypotheses when averaging over the performance in all sensors (significance shown in Supplementary Figure 10).

Sensor-timepoint results. A group of sensors in the occipital lobes are significantly better predicted by H3 than by H4.1 at 200 – 250ms (paired t-test, 0.05 significance level, FDR controlled for multiple comparisons). This is when semantic processing of a word begins, so H3 may outperform H4.1 here because H3 has an independent contribution from the word representation. Both H3 and H4.1 perform significantly better than chance during 450 – 500ms, and there are different sensor groups in the frontal lobe that are significantly

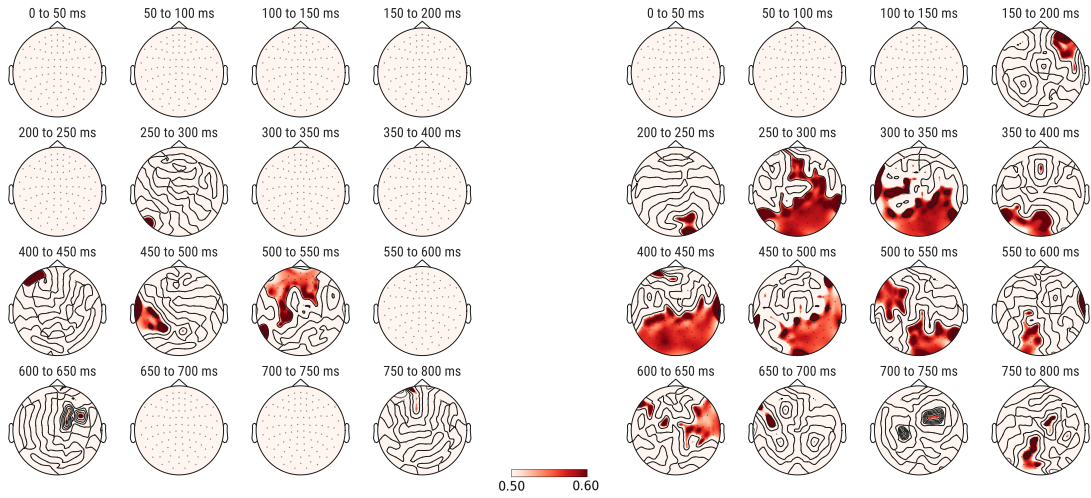


Figure 5: Mean 2v2 accuracy across subjects of predicting sensor-timepoints in 50ms windows using H4.1, when predicting the brain recordings for two word-question pairs that share the same word (Left) and the same question (Right). Displayed accuracies are significantly greater than 0.5. The main question contribution appears in the frontal and temporal lobes during 400 – 550ms, whereas the word contribution is distributed across the occipital and temporal lobes during 200 – 650ms.

better predicted by each hypothesis than the other. This suggests that this time point may contain both independent and interactive contributions of the task. We lastly observe that H4.1 outperforms H3 in the left temporal lobe during 600 – 650ms. This localization suggests that the word and question semantics may interact in this time period, rather than be processed independently. These results are shown in Supplementary Figure 11.

Learned attention. There are no significant differences between H4.2 and H4.1, and the learned attention is highly similar to the precomputed one (Pearson correlation of 0.69 between the pairwise cosine distances of the task-specific precomputed and learned attention parameters; more details in Appendix E). This suggests that either the precomputed attention is one optimal way to combine the stimulus and task in predicting the recordings, or that more samples are needed to learn a better one.

Taken together, these results point to a robust effect of the question task semantics on the brain activity during 475 – 550ms. We also find an effect of the interaction between the question and stimulus semantics during 600 – 650ms, localized to the temporal lobe. The temporal lobes are implicated in semantic processing (Binder *et al.*, 2009; Hagoort, 2013; Skeide and Friederici, 2016; Hickok and Poeppel, 2016) and specifically in maintaining relevant lexical semantic information for the purposes of integration (Hagoort, 2020). Since this effect occurs past the time when a word is thought to be processed (i.e. up to 600ms), it may be related to maintaining specific semantic dimensions that help answer the question (the median response time across participants is 913ms). In addition to being localized to the temporal lobes, the earlier question effect is also found in the frontal lobes, which are thought to support attention (Duncan, 1995; Stuss, 2006). A task effect that is related to attention is consistent with findings from (Cukur *et al.*, 2013; Nastase *et al.*, 2017). Our results

expand these previous findings by characterizing the temporal dynamics of the task-stimulus interactions.

5 Conclusions and future work

We propose a computational framework for comparing different hypotheses about how a task affects the meaning of an observed stimulus. The hypotheses are formulated as prediction problems, where a model is trained to predict the brain recordings of a participant as a function of the task and stimulus representations. We show that incorporating the semantics of a question into the predictive model significantly improves the prediction of MEG recordings of participants answering questions about concrete nouns. The timing of the effect coincides with the end of semantic processing for a word, as well as times when the participant is deciding how to answer the question. These results suggest that only the end of semantic processing of a word is task-dependent, and pose a challenge for future research to formulate new hypotheses for earlier effects on processing as a function of the task and stimuli. Furthermore, only one of the tested hypotheses (H4.1) is experiment-dependent and all others can be applied to data from any neuroscience experiment as long as task and stimulus feature representations can be obtained. Future work can build on our results by investigating task representations from powerful deep learning models tuned for performing a particular task (e.g., question representations derived from BERT after fine-tuning on a question-answering task).

6 Acknowledgments

This material is based upon work supported by the DARPA D3M program, the NSF Graduate Research Fellowship, the Google Faculty Research Award, start-up funds in the Machine Learning Department at Carnegie Mellon University, and the AFOSR through research grants FA95501710218 and FA95502010118.

References

- Abadi, M., Agarwal, A., Barham, P., Brevdo, E., Chen, Z., Citro, C., Corrado, G. S., Davis, A., Dean, J., Devin, M., Ghemawat, S., Goodfellow, I., Harp, A., Irving, G., Isard, M., Jia, Y., Jozefowicz, R., Kaiser, L., Kudlur, M., Levenberg, J., Mané, D., Monga, R., Moore, S., Murray, D., Olah, C., Schuster, M., Shlens, J., Steiner, B., Sutskever, I., Talwar, K., Tucker, P., Vanhoucke, V., Vasudevan, V., Viégas, F., Vinyals, O., Warden, P., Wattenberg, M., Wicke, M., Yu, Y., and Zheng, X. (2015). TensorFlow: Large-scale machine learning on heterogeneous systems. Software available from tensorflow.org.
- Benjamini, Y. and Hochberg, Y. (1995). Controlling the false discovery rate: a practical and powerful approach to multiple testing. *Journal of the Royal statistical society: series B (Methodological)*, **57**(1), 289–300.
- Binder, J. R., Desai, R. H., Graves, W. W., and Conant, L. L. (2009). Where is the

- semantic system? a critical review and meta-analysis of 120 functional neuroimaging studies. *Cerebral cortex*, **19**(12), 2767–2796.
- Brouwer, G. J. and Heeger, D. J. (2013). Categorical clustering of the neural representation of color. *Journal of Neuroscience*, **33**(39), 15454–15465.
- Cohen, J. D., Dunbar, K., and McClelland, J. L. (1990). On the control of automatic processes: a parallel distributed processing account of the stroop effect. *Psychological review*, **97**(3), 332.
- Cukur, T., Nishimoto, S., Huth, A. G., and Gallant, J. L. (2013). Attention during natural vision warps semantic representation across the human brain. *Nature Neuroscience*, **16**(6), 763.
- Devlin, J., Chang, M.-W., Lee, K., and Toutanova, K. (2018). Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*.
- Duncan, J. (1995). Attention, intelligence, and the frontal lobes.
- Fyshe, A., Murphy, B., Talukdar, P., and Mitchell, T. (2013). Documents and dependencies: an exploration of vector space models for semantic composition. In *Proceedings of the Seventeenth Conference on Computational Natural Language Learning*, pages 84–93.
- Gan, G., Büchel, C., and Isel, F. (2013). Effect of language task demands on the neural response during lexical access: a functional magnetic resonance imaging study. *Brain and behavior*, **3**(4), 402–416.
- Hagoort, P. (2013). Muc (memory, unification, control) and beyond. *Frontiers in psychology*, **4**, 416.
- Hagoort, P. (2020). The meaning-making mechanism (s) behind the eyes and between the ears. *Philosophical Transactions of the Royal Society B*, **375**(1791), 20190301.
- Hebart, M. N., Bankson, B. B., Harel, A., Baker, C. I., and Cichy, R. M. (2018). The representational dynamics of task and object processing in humans. *Elife*, **7**, e32816.
- Helenius, P., Salmelin, R., Service, E., and Connolly, J. F. (1998). Distinct time courses of word and context comprehension in the left temporal cortex. *Brain: a journal of neurology*, **121**(6), 1133–1142.
- Hermann, K. M., Kocisky, T., Grefenstette, E., Espeholt, L., Kay, W., Suleyman, M., and Blunsom, P. (2015). Teaching machines to read and comprehend. In *Advances in Neural Information Processing Systems*, pages 1693–1701.
- Hickok, G. and Poeppel, D. (2016). Neural basis of speech perception. In *Neurobiology of Language*, pages 299–310. Elsevier.
- Huth, A. G., de Heer, W. A., Griffiths, T. L., Theunissen, F. E., and Gallant, J. L. (2016). Natural speech reveals the semantic maps that tile human cerebral cortex. *Nature*, **532**(7600), 453–458.

- Jain, S. and Huth, A. (2018). Incorporating context into language encoding models for fmri. In *Advances in Neural Information Processing Systems*, pages 6628–6637.
- Kanwisher, N. and Wojciulik, E. (2000). Visual attention: insights from brain imaging. *Nature Reviews Neuroscience*, **1**(2), 91–100.
- Kiefer, M. (2001). Perceptual and semantic sources of category-specific effects: Event-related potentials during picture and word categorization. *Memory & Cognition*, **29**(1), 100–116.
- Kingma, D. P. and Ba, J. (2014). Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*.
- Kriegeskorte, N., Mur, M., and Bandettini, P. A. (2008). Representational similarity analysis-connecting the branches of systems neuroscience. *Frontiers in systems neuroscience*, **2**, 4.
- Mitchell, T. M., Shinkareva, S. V., Carlson, A., K. M. Chang, V. L. M., and Just, R. A. M. (2008). Predicting human brain activity associated with the meanings of nouns. *Science*, **320**(5880), 1191–1195.
- Nastase, S. A., Connolly, A. C., Oosterhof, N. N., Halchenko, Y. O., Guntupalli, J. S., Visconti di Oleggio Castello, M., Gors, J., Gobbini, M. I., and Haxby, J. V. (2017). Attention selectively reshapes the geometry of distributed semantic representation. *Cerebral Cortex*, **27**(8), 4277–4291.
- Nishimoto, S., Vu, A., Naselaris, T., Benjamini, Y., Yu, B., and Gallant, J. (2011). Reconstructing visual experiences from brain activity evoked by natural movies. *Current Biology*.
- Pedregosa, F., Varoquaux, G., Gramfort, A., Michel, V., Thirion, B., Grisel, O., Blondel, M., Prettenhofer, P., Weiss, R., Dubourg, V., Vanderplas, J., Passos, A., Cournapeau, D., Brucher, M., Perrot, M., and Duchesnay, E. (2011). Scikit-learn: Machine learning in Python. *Journal of Machine Learning Research*, **12**, 2825–2830.
- Skeide, M. A. and Friederici, A. D. (2016). The ontogeny of the cortical language network. *Nature Reviews Neuroscience*, **17**(5), 323.
- Smith, E. E., Shoben, E. J., and Rips, L. J. (1974). Structure and process in semantic memory: A featural model for semantic decisions. *Psychological review*, **81**(3), 214.
- Stuss, D. T. (2006). Frontal lobes and attention: processes and networks, fractionation and integration. *Journal of the International Neuropsychological Society*, **12**(2), 261–271.
- Sudre, G. (2012). Characterizing the spatiotemporal neural representation of concrete nouns across paradigms.
- Sudre, G., Pomerleau, D., Paratucci, M., Wehbe, L., Fyshe, A., Salmelin, R., and Mitchell, T. (2012). Tracking neural coding of perceptual and semantic features of concrete nouns. *NeuroImage*, **62**(1), 451–463.

- Taulu, S. and Simola, J. (2006). Spatiotemporal signal space separation method for rejecting nearby interference in meg measurements. *Physics in Medicine & Biology*, **51**(7), 1759.
- Toneva, M. and Wehbe, L. (2019). Interpreting and improving natural-language processing (in machines) with natural language-processing (in the brain). *arXiv preprint arXiv:1905.11833*.
- Wang, X., Xu, Y., Wang, Y., Zeng, Y., Zhang, J., Ling, Z., and Bi, Y. (2018). Representational similarity analysis reveals task-dependent semantic influence of the visual word form area. *Scientific reports*, **8**(1), 1–10.
- Wehbe, L., Vaswani, A., Knight, K., and Mitchell, T. (2014a). Aligning context-based statistical models of language with brain activity during reading. In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing*, pages 233–243.
- Wehbe, L., Vaswani, A., Knight, K., and Mitchell, T. (2014b). Aligning context-based statistical models of language with brain activity during reading. In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 233–243.
- Wolf, T., Debut, L., Sanh, V., Chaumond, J., Delangue, C., Moi, A., Cistac, P., Rault, T., Louf, R., Funtowicz, M., and Brew, J. (2019). Huggingface’s transformers: State-of-the-art natural language processing. *ArXiv*, **abs/1910.03771**.
- Xu, Y., Wang, X., Wang, X., Men, W., Gao, J.-H., and Bi, Y. (2018). Doctor, teacher, and stethoscope: neural representation of different types of semantic relations. *Journal of Neuroscience*, **38**(13), 3303–3317.

Appendix

A Data preprocessing

MEG data preprocessing. The data were first preprocessed using the Signal Space Separation method (SSS) (Taulu and Simola, 2006) in order to isolate the signal components that originate inside of the sensor array. This method was followed by its temporal extension (tSSS) to align the measurements of the head position before each block to a common space. The MEG signal was then filtered using a low-pass filter at 150Hz and notch filters at 60Hz and 120Hz to remove contributions from electrical line noise and other very high frequency noise. Next, the Signal Space Projection method was applied to remove eye blinks, residual movement, and other artifacts.

Input and output normalization. When training our prediction models, both the model inputs and the targets are normalized as follows. For the input features (which could be word features, question features or both, depending on the hypothesis), we z-score each feature x_i along the sample dimension by assigning $x_i \leftarrow \frac{x_i - \text{mean}(x_i)}{\text{std}(x_i)}$, such that each feature x_i has mean 0 and standard deviation 1 across the samples. Similarly, we z-score every sensor-timepoint of the outputs across samples. However, to make sure our evaluation is correct and no information about the test data has been leaked during training, the mean and standard deviation used when z-scoring is calculated only over the training data.

B 2v2 metric

There are several metrics that can be used to directly measure how close the brain activity prediction is from the ground truth, such as *Euclidean distance*, *cosine distance*, *percent of variance explained*. In our experiments, we use these metrics to choose the tunable model parameters (e.g., regularization λ). Another way to compare the hypotheses is by trying to match the predicted left-out brain responses to their corresponding ground truth, as introduced in Mitchell *et al.* (2008), and illustrated in Figure 6. Having 2 left out repetitions, with predictions \hat{b}_1 and \hat{b}_2 , and corresponding ground truth b_1 and b_2 , we calculate two scores: $score_1 = \text{dist}(\hat{b}_1, b_1) + \text{dist}(\hat{b}_2, b_2)$ and $score_2 = \text{dist}(\hat{b}_1, b_2) + \text{dist}(\hat{b}_2, b_1)$, where the distance used in our experiments is cosine distance. If $score_1 < score_2$, we match $\hat{b}_1 \leftrightarrow b_1$ and $\hat{b}_2 \leftrightarrow b_2$ (correct match, accuracy 1), otherwise we match $\hat{b}_1 \leftrightarrow b_2$ and $\hat{b}_2 \leftrightarrow b_1$ (wrong match, accuracy 0). We further refer to this as the *2v2 accuracy*. Note that in our setting, we hold out more than 2 repetitions (i.e. word-question combinations), but in order to compute this metric, we take multiple combinations of 2 repetitions. Under this metric, chance performance is 50%.

C Training details

Train/test splits. The next step is to train and evaluate the proposed models. For this, we need to separate our data into a train set and a test set. Since our dataset contains very few samples, as it is usually the case in neuroscience, we adopt the common *leave-k-out*

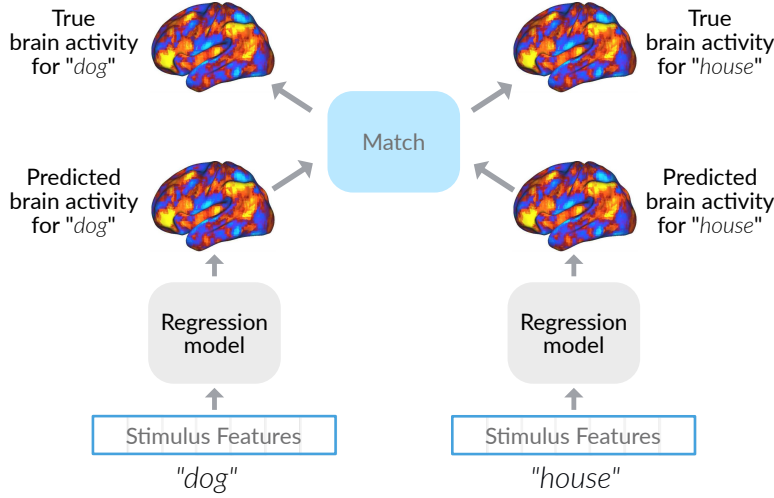


Figure 6: 2v2 metric. The predictions for two repetitions, \hat{b}_1 and \hat{b}_2 , are being matched to their corresponding true brain activities, b_1 and b_2 . The match is performed based on the distances between each of the predictions, to each of the true brain activities: $score_1 = dist(\hat{b}_1, b_1) + dist(\hat{b}_2, b_2)$ and $score_2 = dist(\hat{b}_1, b_2) + dist(\hat{b}_2, b_1)$. If $score_1 < score_2$, we match $\hat{b}_1 \leftrightarrow b_1$ and $\hat{b}_2 \leftrightarrow b_2$ (correct match, obtaining an accuracy of 1.0), otherwise we match $\hat{b}_1 \leftrightarrow b_2$ and $\hat{b}_2 \leftrightarrow b_1$ (wrong match, accuracy 0.0). The distance used in our experiments is cosine distance.

cross-validation approach (Mitchell *et al.*, 2008; Sudre *et al.*, 2012; Wehbe *et al.*, 2014b), in which the data is repeatedly split into 2 groups: one containing k repetitions for test, and one with $R - k$ repetitions used for training. Each training set is further split into 2 subgroups using a similar approach: one for training, and one for parameter validation. A model is trained on the inner training set using multiple hyperparameters, and the ones with the best average validation accuracy are selected. Using the best hyperparameters, we retrain on the train+validation data, and compute the final accuracy on the test set. A common choice for k in approaches that average the stimulus repetitions (Mitchell *et al.*, 2008; Sudre *et al.*, 2012) is 2, because this allows us to compare the brain activities for two left out stimuli (as described in the next paragraph), while training on as much data as possible. However, since we want our models to perform zero-shot learning and to be able to make predictions for both words and questions that have not been seen during training, we leave out from training 2 stimuli with all their 20 repetitions under different questions, but also 2 questions with all 60 words about which this question was asked (i.e. a total of $2 \times 20 + 60 \times 2 = 160$ examples). Out of these 160 examples, we only test the model performance on the word-question pairs for which neither the word nor the question appear in training. We do this type of splitting both when performing train/test splitting, and for train/validation splitting.

Optimization. While H1, H2 and H3 can be solved in closed form, we use the Cholesky decomposition approach provided in the Python `scikit-learn` package (Pedregosa *et al.*, 2011) for computational reasons. In H4, we need to optimize the parameters of the functions

g and f_s together, and thus we implemented this using the TensorFlow framework (Abadi *et al.*, 2015) and trained end-to-end using the Adam optimizer (Kingma and Ba, 2014) with default parameters and learning rate 0.001.

Parameters and hyperparameters. The only hyperparameters in our framework are the regularization parameters λ (for all hypotheses) and λ_A (only for H4.1). Their values were chosen from the set of values $\{10^{-5}, 10^{-4}, \dots, 10^7\}$ using the train/validation/test splitting described above. We also allowed the model to select different λ per sensor-timepoint, but found that using the same value for outputs is more stable and leads to better validation accuracy overall. Moreover, we found conducting the parameter validation using the cross-validation setting described above on all subjects and all hypotheses to be prohibitive, and thus we performed the hyperparameter tuning for each hypothesis on a single subject, which was then excluded from testing. Regarding the number parameters, each hypothesis has a different number of parameters, depending on the size of the inputs and extra attention parameters, with $H3 > H4.1 > H1 = H4.2 > H2$. To ameliorate any effects of overfitting, we allow each hypothesis to choose its own regularization parameters.

D BERT features and corresponding results

Model details BERT is a bidirectional model of stacked transformers that is trained to predict whether a given sentence follows the current sentence, in addition to predicting a number of input words that have been masked (Devlin *et al.*, 2018). We use the base pretrained model provided by the Hugging Face Transformers library (Wolf *et al.*, 2019). This model has 12 layers, 12 attention heads, and 768 hidden units.

Extracting BERT word and question features. We first apply WordPiece tokenization to each of our 60 word stimuli and questions. To extract the word features, we pass the tokens corresponding to each word stimuli into the BERT model and extract the corresponding token-level embeddings. We use these token-level embeddings as the BERT word representations in the following experiments. If any word contains more than 1 token, it is assigned the average of the corresponding token-level embeddings.

To extract the question features, we pass the tokenization of each question separately into BERT, with a '[CLS]' token and a '[SEP]' token appended to respectively the beginning and end of the tokenized list. This is common practice with inputting multi-word sequences into BERT. We then extracted the hidden layer activations from the CLS token at the last hidden layer, as well as the pooled output. In the pretrained model, the pooled representation of a sequence is a transformed version of the embedding of the [CLS] token, which is passed through a hidden layer and then a tanh function.

Question feature dissimilarity. There are many different choices for where to extract the question representations from BERT – e.g. the CLS token representation from any of the 12 hidden layers, the pooled output, or a mean or max pooling across all token representations in any of the layers. To settle on which BERT representation may be best suited to predict the MEG recordings, we first visualize how similar the representations for

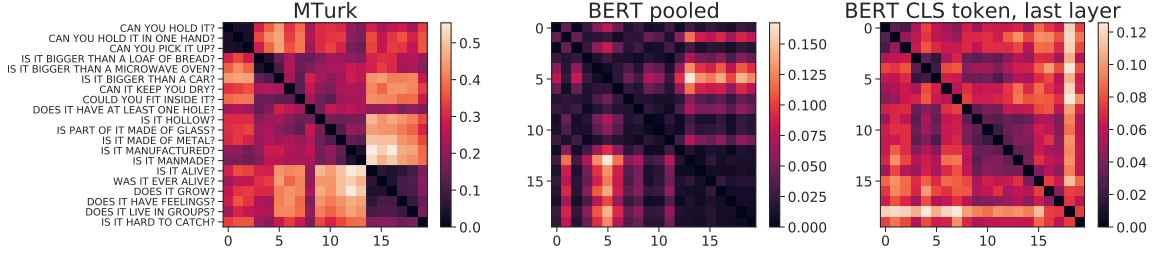


Figure 7: Pairwise cosine distances among the question representations from MTurk and the two types of BERT question representations. The MTurk representations appear to better cluster semantically-similar questions together.

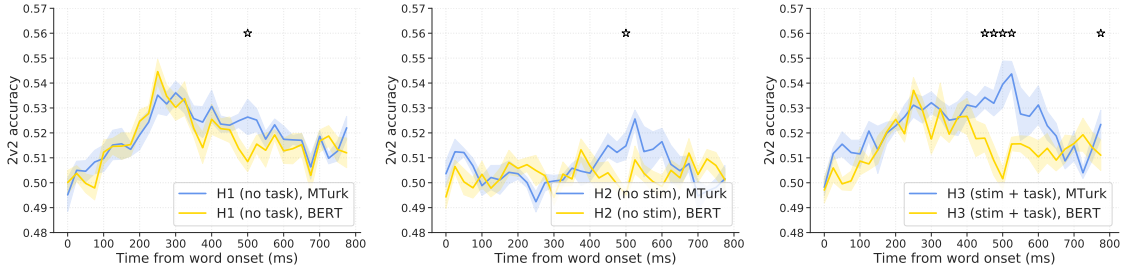


Figure 8: Comparisons of 2v2 accuracies of predictions computed using MTurk vs. BERT features in each hypothesis. Mean accuracy and standard error across subjects plotted. Points where the means across subjects are significantly different are marked with a ★ symbol.

our 20 questions are under different BERT representations (see Figure 7). We observe that the MTurk representations appear to better cluster semantically-similar questions together. The representations from the CLS token at the last layer appear to cluster together sentences that share words, whereas the pooled output representations appear to lead to at least two larger clusters that correspond to questions related to animacy and size. We therefore conduct experiments using the BERT pooled output embeddings as the question representations.

Performance against MTurk features. Features extracted from BERT for both the stimuli and questions perform significantly worse than the Mechanical Turk (MTurk) features in several timewindows across hypotheses (see Figure 8) (paired t-test, significance level 0.05, FDR controlled for multiple comparisons (Benjamini and Hochberg, 1995)). Some of the difference in performance may be due to the large difference in dimensionality between the BERT and MTurk features. The BERT features have much higher dimensionality than the MTurk features, which may lead to more overfitting when using the BERT features. However, this is likely not the only cause for the difference, as the question representations from BERT appear much worse at predicting the MEG recordings in the 450 – 550ms timewindow, where we show the question/task semantics contribute most to the MEG recordings. It is likely that the pretrained BERT model is not able to compose the input words in a way that is as brain-aligned as the question representations from Mechanical Turk. It would be an

interesting future direction to fine-tune BERT on a question-answering task and compare the performance of the pretrained question representations with that of the fine-tuned BERT representations.

E Attention

Relevant word features determined by the precomputed attention. The precomputed attention is described in Section 3.4.1, and assigns a different relevance score (between 0 to 1) to each word feature for each question. Here we list the top 5 most relevant word features (i.e. with highest attention scores) for each of the 20 experimental question, as determined by the precomputed attention. The features are listed in decreasing order of importance (the first is the most important).

1. 'Can you hold it?':
 - CAN IT BE EASILY MOVED?
 - IS IT LIGHTWEIGHT?
 - WOULD YOU FIND IT IN A HOUSE?
 - CAN YOU TOUCH IT?
 - CAN YOU BUY IT?
2. 'Can you hold it in one hand?':
 - CAN IT BE EASILY MOVED?
 - IS IT LIGHTWEIGHT?
 - WOULD YOU FIND IT IN A HOUSE?
 - DO YOU HOLD IT TO USE IT?
 - CAN YOU BUY IT?
3. 'Can you pick it up?':
 - CAN IT BE EASILY MOVED?
 - IS IT LIGHTWEIGHT?
 - CAN YOU BUY IT?
 - WOULD YOU FIND IT IN A HOUSE?
 - DO YOU HOLD IT TO USE IT?
4. 'Is it bigger than a loaf of bread?':
 - IS IT HEAVY?
 - IS IT TALLER THAN A PERSON?
 - IS IT LONG?
 - DOES IT COME IN DIFFERENT SIZES?

- IS IT USUALLY OUTSIDE?
5. 'Is it bigger than a microwave oven?':
- IS IT TALLER THAN A PERSON?
 - IS IT HEAVY?
 - IS IT BIGGER THAN A BED?
 - IS IT LONG?
 - IS IT USUALLY OUTSIDE?
6. 'Is it bigger than a car?':
- IS IT BIGGER THAN A BED?
 - IS IT BIGGER THAN A HOUSE?
 - IS IT TALLER THAN A PERSON?
 - IS IT HEAVY?
 - IS IT LONG?
7. 'Can it keep you dry?':
- DOES IT PROVIDE SHADE?
 - IS IT A BUILDING?
 - DOES IT PROVIDE PROTECTION?
 - CAN YOU TOUCH IT?
 - ARE THERE MANY VARIETIES OF IT?
8. 'Could you fit inside it?':
- IS IT BIGGER THAN A BED?
 - IS IT TALLER THAN A PERSON?
 - DOES IT PROVIDE SHADE?
 - IS IT A BUILDING?
 - IS IT BIGGER THAN A HOUSE?
9. 'Does it have at least one hole?':
- DOES IT HAVE A FRONT AND A BACK?
 - IS IT SYMMETRICAL?
 - DOES IT HAVE PARTS?
 - DOES IT COME IN DIFFERENT SIZES?
 - DOES IT HAVE INTERNAL STRUCTURE?
10. 'Is it hollow?':

- IS IT A BUILDING?
 - DOES IT HAVE FLAT / STRAIGHT SIDES?
 - DOES IT OPEN?
 - DOES IT COME IN DIFFERENT SIZES?
 - CAN YOU TOUCH IT?
11. 'Is part of it made of glass?':
- DOES IT HAVE WIRES OR A CORD?
 - DOES IT USE ELECTRICITY?
 - IS IT A BUILDING?
 - DOES IT HAVE FLAT / STRAIGHT SIDES?
 - DOES IT HAVE WRITING ON IT?
12. 'Is it made of metal?':
- IS IT SILVER?
 - IS IT MECHANICAL?
 - WAS IT INVENTED?
 - IS IT SHINY?
 - DOES IT HAVE A HARD OUTER SHELL?
13. 'Is it manufactured?':
- WAS IT INVENTED?
 - DOES IT HAVE WRITING ON IT?
 - DOES IT HAVE FLAT / STRAIGHT SIDES?
 - CAN YOU USE IT?
 - CAN YOU BUY IT?
14. 'Is it manmade?':
- WAS IT INVENTED?
 - DOES IT HAVE FLAT / STRAIGHT SIDES?
 - DOES IT HAVE WRITING ON IT?
 - CAN YOU USE IT?
 - ARE THERE MANY VARIETIES OF IT?
15. 'Is it alive?':
- IS IT CONSCIOUS?
 - IS IT AN ANIMAL?
 - IS IT WARM BLOODED?

- DOES IT HAVE EARS?
 - IS IT WILD?
16. 'Was it ever alive?':
- IS IT AN ANIMAL?
 - IS IT WILD?
 - CAN IT BITE OR STING?
 - IS IT CURVED?
 - IS IT CONSCIOUS?
17. 'Does it grow?':
- IS IT WILD?
 - IS IT CONSCIOUS?
 - IS IT AN ANIMAL?
 - CAN IT BITE OR STING?
 - IS IT WARM BLOODED?
18. 'Does it have feelings?':
- IS IT CONSCIOUS?
 - DOES IT HAVE EARS?
 - DOES IT HAVE A BACKBONE?
 - IS IT WARM BLOODED?
 - DOES IT HAVE A FACE?
19. 'Does it live in groups?':
- IS IT AN ANIMAL?
 - CAN IT JUMP?
 - IS IT A HERBIVORE?
 - IS IT WILD?
 - IS IT CONSCIOUS?
20. 'Is it hard to catch?':
- IS IT FAST?
 - IS IT A PREDATOR?
 - IS IT AN ANIMAL?
 - CAN IT JUMP?
 - IS IT USUALLY OUTSIDE?

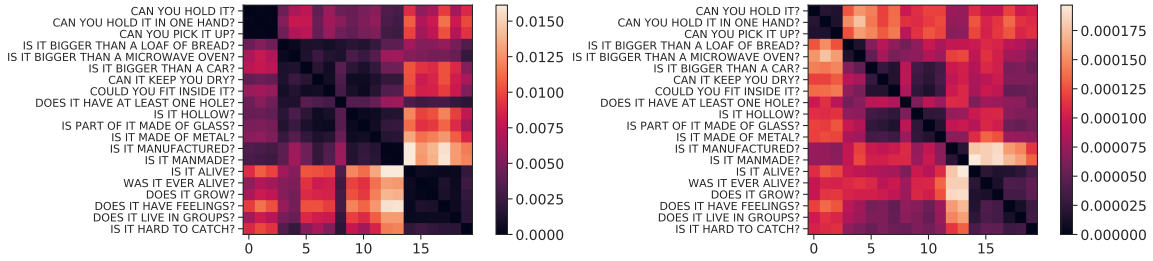


Figure 9: Pairwise cosine distances across the question-wise attention in H4.1 (Left) and H4.2 (Right). The question-wise attention in H4.2 is an average over participants. The Pearson correlation between these matrices (upper-triangle only) is 0.69, indicating a high degree of correspondence between the precomputed attention (Left) and the mean learned attention (Right).

Learned attention vs. precomputed attention We want to compare the learned attention parameters in H4.2 to the precomputed ones in H4.1. To this end, we compute the pairwise cosine distances across the precomputed question-wise attention, across the learned question-wise attention. The resulting cosine distance matrices are visualized in Figure 9. To quantify the similarity between the two, we compute the Pearson correlation between the upper-triangles of the two matrices, which comes out to 0.69. This indicates that the learned attention, that is randomly initialized, learns to combine the question and word features in a way that is very similar to the precomputed attention.

F Supplementary results

Pairwise comparisons across all hypotheses. We present the pairwise comparisons of 2v2 accuracy performance across all tested hypotheses in Figure 10. All timepoints where there is significant difference between the performances of the two displayed hypotheses are marked with a star (paired t-test, significance level 0.05, FDR controlled for multiple comparisons). The hypothesis that does not incorporate information about the stimulus (H2) performs significantly worse than all hypotheses that do during 250 – 400ms. The hypothesis that does not incorporate information about the task (H1) performs significantly worse than two hypotheses that do (H3 and H4.1) in time windows between 450 and 550ms. There is no significant difference in the performances across timewindows of all hypotheses that are a function of both the stimulus and task (H3, H4.1, and H4.2)

Sensor-timepoint comparison of H4.1 against H3. We present the significant differences in performance between H4.1 and H3 per sensor-timepoint in Figure 11. We have plotted H4.1 accuracy - H3 accuracy (the red points are those where H4.1 significantly outperforms H3, and the blue are those where H3 significantly outperforms H4.1). We’re only displaying the significant differences for those timepoints where H4.1 performs significantly better than chance (Left) and where H3 performs significantly better than chance (Right). The discussion of these results can be found in the main text in Section 4.2.

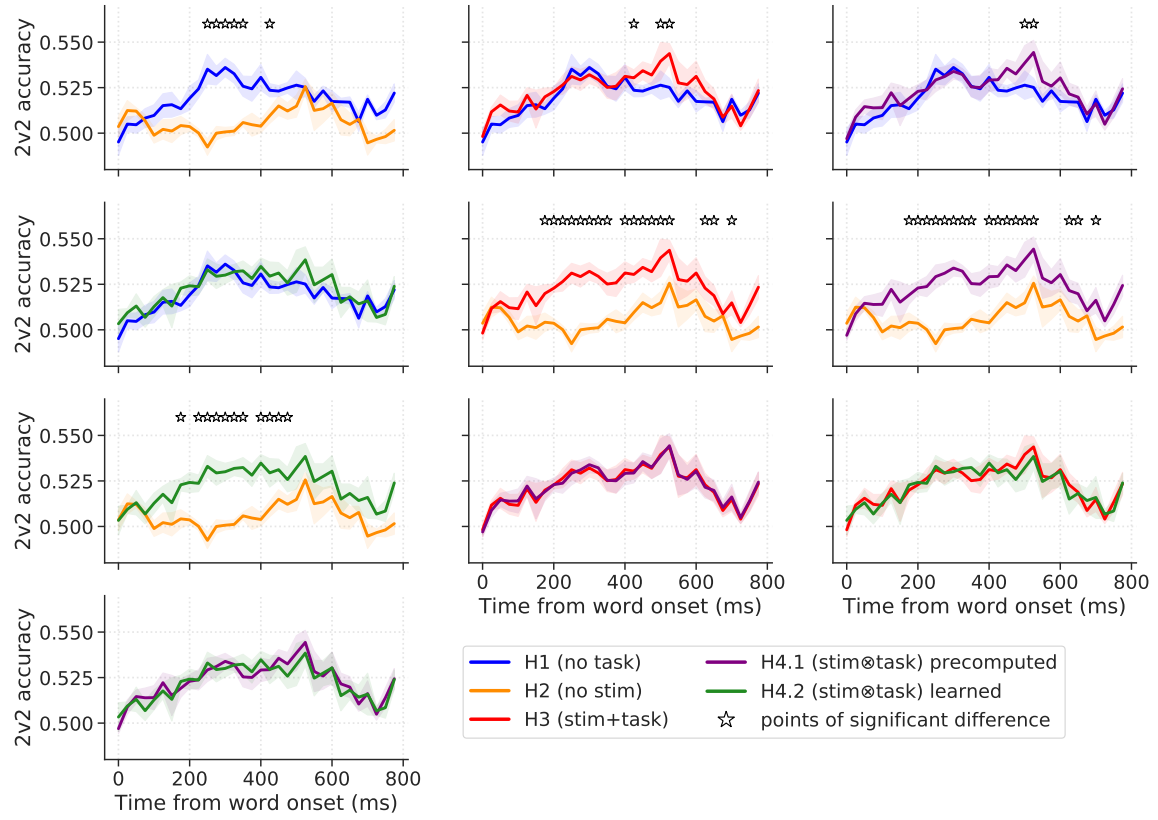


Figure 10: Pairwise comparisons of 2v2 accuracy performance across all tested hypotheses. All timepoints where there is significant difference between the performances of the two displayed hypotheses are marked with a star.

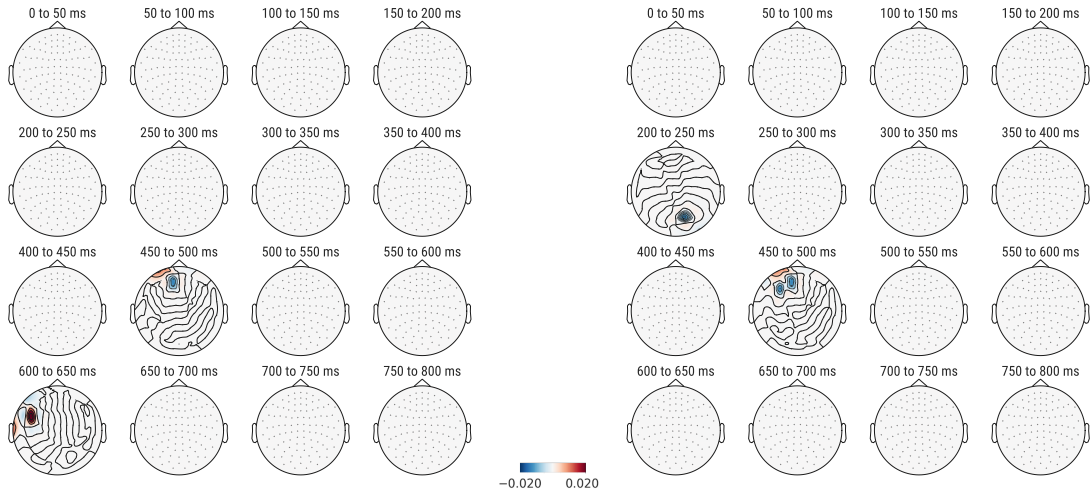


Figure 11: Significant differences in performance between H4.1 and H3 per sensor-timepoint (H4.1 accuracy - H3 accuracy). The red points are those where H4.1 significantly outperforms H3, and the blue are those where H3 significantly outperforms H4.1. We're only displaying the significant differences for those timepoints where H4.1 performs significantly better than chance (Left) and where H3 performs significantly better than chance (Right).

Sensor-timepoint results for H4.1 for 25ms windows. We present the sensor-timepoint results for H3 for 25ms time-windows in Figure 12. They follow the general trend of the results from 50ms time-windows presented in Figure 5.

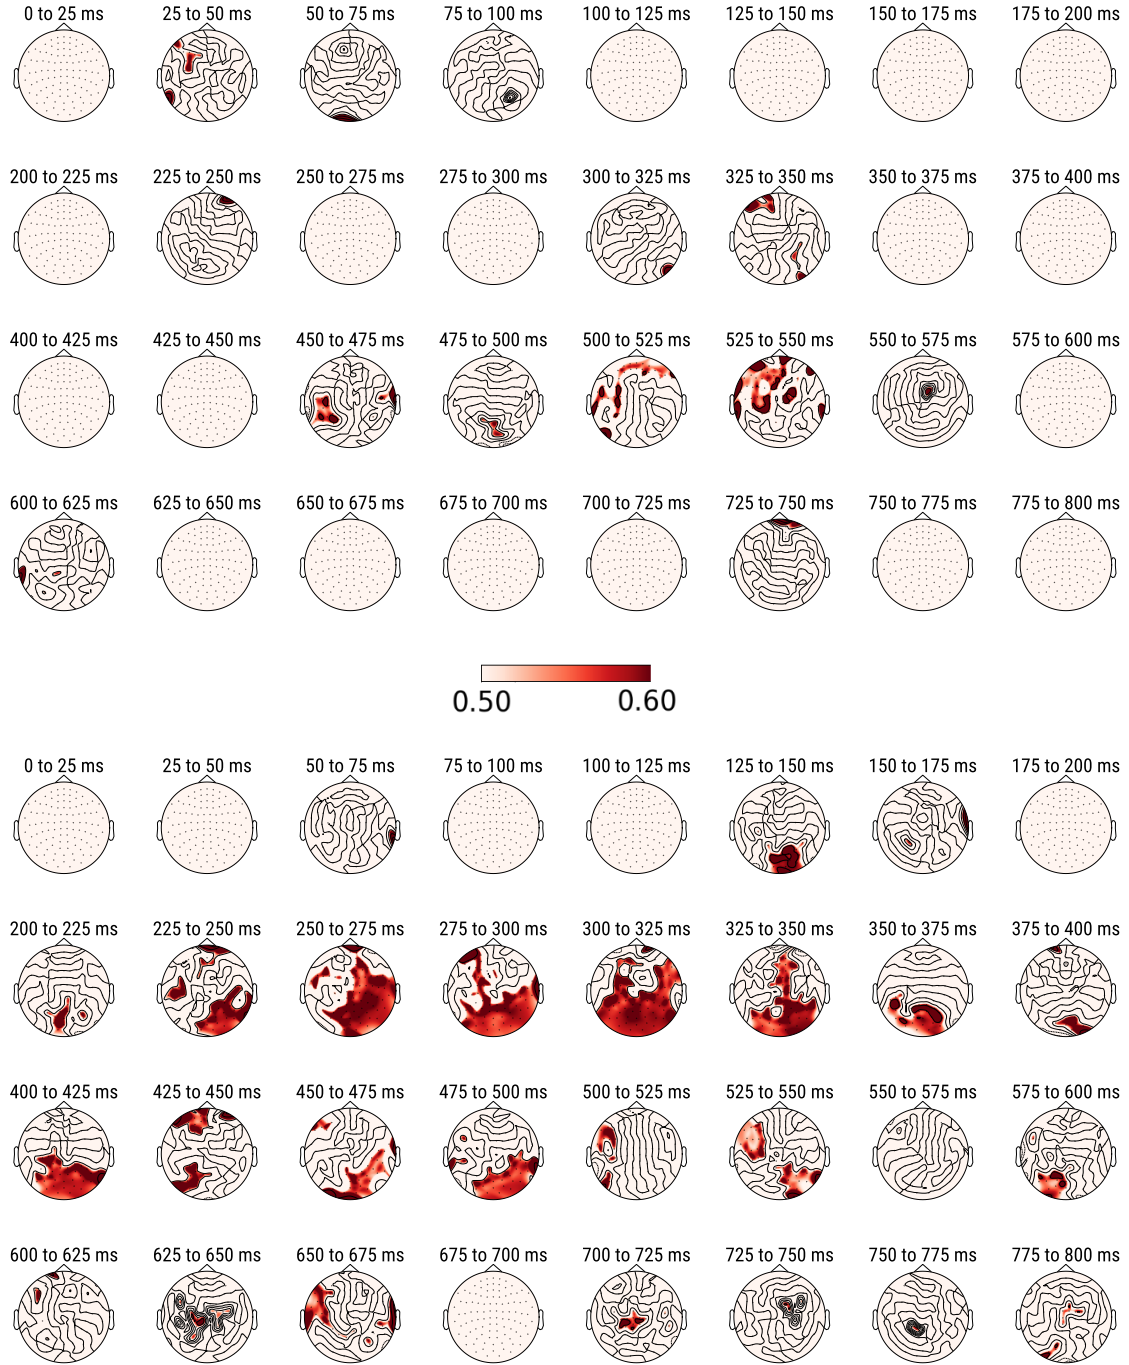


Figure 12: Mean 2v2 accuracy across subjects of predicting sensor-timepoints in 25ms timewindows using H4.1, when predicting the brain recordings for two stimulus-question pairs that share the same word (Top) and the same question (Bottom). The displayed accuracies are significantly greater than chance.

G Stimuli and questions

Questions in experiment.

- 'Can you hold it?',
- 'Can you hold it in one hand?',
- 'Can you pick it up?',
- 'Is it bigger than a loaf of bread?',
- 'Is it bigger than a microwave oven?',
- 'Is it bigger than a car?',
- 'Can it keep you dry?',
- 'Could you fit inside it?',
- 'Does it have at least one hole?',
- 'Is it hollow?',
- 'Is part of it made of glass?',
- 'Is it made of metal?',
- 'Is it manufactured?',
- 'Is it manmade?',
- 'Is it alive?',
- 'Was it ever alive?',
- 'Does it grow?',
- 'Does it have feelings?',
- 'Does it live in groups?',
- 'Is it hard to catch?'

Stimuli in experiment. : 'dog', 'horse', 'arm', 'eye', 'foot', 'hand', 'leg', 'apartment', 'barn', 'church', 'house', 'igloo', 'arch', 'chimney', 'closet', 'door', 'window', 'coat', 'dress', 'pants', 'shirt', 'skirt', 'bed', 'chair', 'desk', 'dresser', 'table', 'ant', 'bee', 'beetle', 'butterfly', 'fly', 'bottle', 'cup', 'glass', 'knife', 'spoon', 'bell', 'key', 'refrigerator', 'telephone', 'watch', 'chisel', 'hammer', 'pliers', 'saw', 'screwdriver', 'carrot', 'celery', 'corn', 'lettuce', 'tomato', 'airplane', 'bicycle', 'car', 'train', 'truck'

All questions asked on Mechanical Turk. : 'IS IT AN ANIMAL?', 'IS IT A BODY PART?', 'IS IT A BUILDING?', 'IS IT A BUILDING PART?', 'IS IT CLOTHING?', 'IS IT FURNITURE?', 'IS IT AN INSECT?', 'IS IT A KITCHEN ITEM?', 'IS IT MANMADE?', 'IS IT A TOOL?', 'CAN YOU EAT IT?', 'IS IT A VEHICLE?', 'IS IT A PERSON?', 'IS IT A VEGETABLE / PLANT?', 'IS IT A FRUIT?', 'IS IT MADE OF METAL?', 'IS IT MADE OF PLASTIC?', 'IS PART OF IT MADE OF GLASS?', 'IS IT MADE OF WOOD?', 'IS IT SHINY?', 'CAN YOU SEE THROUGH IT?', 'IS IT COLORFUL?', 'DOES IT CHANGE COLOR?', 'IS ONE MORE THAN ONE COLORED?', 'IS IT ALWAYS THE SAME COLOR(S)?', 'IS IT WHITE?', 'IS IT RED?', 'IS IT ORANGE?', 'IS IT FLESH-COLORED?', 'IS IT YELLOW?', 'IS IT GREEN?', 'IS IT BLUE?', 'IS IT SILVER?', 'IS IT BROWN?', 'IS IT BLACK?', 'IS IT CURVED?', 'IS IT STRAIGHT?', 'IS IT FLAT?', 'DOES IT HAVE A FRONT AND A BACK?', 'DOES IT HAVE A FLAT / STRAIGHT TOP?', 'DOES IT HAVE FLAT / STRAIGHT SIDES?', 'IS TALLER THAN IT IS WIDE/LONG?', 'IS IT LONG?', 'IS IT POINTED / SHARP?', 'IS IT TAPERED?', 'IS IT ROUND?', 'DOES IT HAVE CORNERS?', 'IS IT SYMMETRICAL?', 'IS IT HAIRY?', 'IS IT FUZZY?', 'IS IT CLEAR?', 'IS IT SMOOTH?', 'IS IT SOFT?', 'IS IT HEAVY?', 'IS IT LIGHTWEIGHT?', 'IS IT DENSE?', 'IS IT SLIPPERY?', 'CAN IT CHANGE SHAPE?', 'CAN IT BEND?', 'CAN IT STRETCH?', 'CAN IT BREAK?', 'IS IT FRAGILE?', 'DOES IT HAVE PARTS?', 'DOES IT HAVE MOVING PARTS?', 'DOES IT COME IN PAIRS?', 'DOES IT COME IN A BUNCH/PACK?', 'DOES IT LIVE IN GROUPS?', 'IS IT PART OF SOMETHING LARGER?', 'DOES IT CONTAIN SOMETHING ELSE?', 'DOES IT HAVE INTERNAL STRUCTURE?', 'DOES IT OPEN?', 'IS IT HOLLOW?', 'DOES IT HAVE A HARD INSIDE?', 'DOES IT HAVE A HARD OUTER SHELL?', 'DOES IT HAVE AT LEAST ONE HOLE?', 'IS IT ALIVE?', 'WAS IT EVER ALIVE?', 'IS IT A SPECIFIC GENDER?', 'IS IT MANUFACTURED?', 'WAS IT INVENTED?', 'WAS IT AROUND 100 YEARS AGO?', 'ARE THERE MANY VARIETIES OF IT?', 'DOES IT COME IN DIFFERENT SIZES?', 'DOES IT GROW?', 'IS IT SMALLER THAN A GOLFBALL?', 'IS IT BIGGER THAN A LOAF OF BREAD?', 'IS IT BIGGER THAN A MICROWAVE OVEN?', 'IS IT BIGGER THAN A BED?', 'IS IT BIGGER THAN A CAR?', 'IS IT BIGGER THAN A HOUSE?', 'IS IT TALLER THAN A PERSON?', 'DOES IT HAVE A TAIL?', 'DOES IT HAVE LEGS?', 'DOES IT HAVE FOUR LEGS?', 'DOES IT HAVE FEET?', 'DOES IT HAVE PAWS?', 'DOES IT HAVE CLAWS?', 'DOES IT HAVE HORNS / THORNS / SPIKES?', 'DOES IT HAVE HOOVES?', 'DOES IT HAVE A FACE?', 'DOES IT HAVE A BACKBONE?', 'DOES IT HAVE WINGS?', 'DOES IT HAVE EARS?', 'DOES IT HAVE ROOTS?', 'DOES IT HAVE SEEDS?', 'DOES IT HAVE LEAVES?', 'DOES IT COME FROM A PLANT?', 'DOES IT HAVE FEATHERS?', 'DOES IT HAVE SOME SORT OF NOSE?', 'DOES IT HAVE A HARD NOSE/BEAK?', 'DOES IT CONTAIN LIQUID?', 'DOES IT HAVE WIRES OR A CORD?', 'DOES IT HAVE WRITING ON IT?', 'DOES IT HAVE WHEELS?', 'DOES IT MAKE A SOUND?', 'DOES IT MAKE A NICE SOUND?', 'DOES IT MAKE SOUND CONTINUOUSLY WHEN ACTIVE?', 'IS ITS JOB TO MAKE SOUNDS?', 'DOES IT ROLL?', 'CAN IT RUN?', 'IS IT FAST?', 'CAN IT FLY?', 'CAN IT JUMP?', 'CAN IT FLOAT?', 'CAN IT SWIM?', 'CAN IT DIG?', 'CAN IT CLIMB TREES?', 'CAN IT CAUSE YOU PAIN?', 'CAN IT BITE OR STING?', 'DOES IT STAND ON TWO LEGS?', 'IS IT WILD?', 'IS IT A HERBIVORE?', 'IS IT A PREDATOR?', 'IS IT WARM BLOODED?', 'IS IT A MAMMAL?', 'IS IT NOCTURNAL?', 'DOES IT

LAY EGGS?', 'IS IT CONSCIOUS?', 'DOES IT HAVE FEELINGS?', 'IS IT SMART?', 'IS IT MECHANICAL?', 'IS IT ELECTRONIC?', 'DOES IT USE ELECTRICITY?', 'CAN IT KEEP YOU DRY?', 'DOES IT PROVIDE PROTECTION?', 'DOES IT PROVIDE SHADE?', 'DOES IT CAST A SHADOW?', 'DO YOU SEE IT DAILY?', 'IS IT HELPFUL?', 'DO YOU INTERACT WITH IT?', 'CAN YOU TOUCH IT?', 'WOULD YOU AVOID TOUCHING IT?', 'CAN YOU HOLD IT?', 'CAN YOU HOLD IT IN ONE HAND?', 'DO YOU HOLD IT TO USE IT?', 'CAN YOU PLAY IT?', 'CAN YOU PLAY WITH IT?', 'CAN YOU PET IT?', 'CAN YOU USE IT?', 'DO YOU USE IT DAILY?', 'CAN YOU USE IT UP?', 'DO YOU USE IT WHEN COOKING?', 'IS IT USED TO CARRY THINGS?', 'CAN YOU PICK IT UP?', 'CAN YOU CONTROL IT?', 'CAN YOU SIT ON IT?', 'CAN YOU RIDE ON/IN IT?', 'IS IT USED FOR TRANSPORTATION?', 'COULD YOU FIT INSIDE IT?', 'IS IT USED IN SPORTS?', 'DO YOU WEAR IT?', 'CAN IT BE WASHED?', 'IS IT COLD?', 'IS IT COOL?', 'IS IT WARM?', 'IS IT HOT?', 'IS IT UNHEALTHY?', 'IS IT HARD TO CATCH?', 'CAN YOU PEEL IT?', 'CAN YOU WALK ON IT?', 'CAN YOU SWITCH IT ON AND OFF?', 'CAN IT BE EASILY MOVED?', 'DO YOU DRINK FROM IT?', 'DOES IT GO IN YOUR MOUTH?', 'IS IT TASTY?', 'IS IT USED DURING MEALS?', 'DOES IT HAVE A STRONG SMELL?', 'DOES IT SMELL GOOD?', 'DOES IT SMELL BAD?', 'IS IT USUALLY INSIDE?', 'IS IT USUALLY OUTSIDE?', 'WOULD YOU FIND IT ON A FARM?', 'WOULD YOU FIND IT IN A SCHOOL?', 'WOULD YOU FIND IT IN A ZOO?', 'WOULD YOU FIND IT IN AN OFFICE?', 'WOULD YOU FIND IT IN A RESTAURANT?', 'WOULD YOU FIND IT IN THE BATHROOM?', 'WOULD YOU FIND IT IN A HOUSE?', 'WOULD YOU FIND IT NEAR A ROAD?', 'WOULD YOU FIND IT IN A DUMP/LANDFILL?', 'WOULD YOU FIND IT IN THE FOREST?', 'WOULD YOU FIND IT IN A GARDEN?', 'WOULD YOU FIND IT IN THE SKY?', 'DO YOU FIND IT IN SPACE?', 'DOES IT LIVE ABOVE GROUND?', 'DOES IT GET WET?', 'DOES IT LIVE IN WATER?', 'CAN IT LIVE OUT OF WATER?', 'DO YOU TAKE CARE OF IT?', 'DOES IT MAKE YOU HAPPY?', 'DO YOU LOVE IT?', 'WOULD YOU MISS IT IF IT WERE GONE?', 'IS IT SCARY?', 'IS IT DANGEROUS?', 'IS IT FRIENDLY?', 'IS IT RARE?', 'CAN YOU BUY IT?', 'IS IT VALUABLE?'